

DL405 CPU Comparisons

DL405 CPU Specifications			
	D4-430	D4-440	D4-450
System Capacity			
Total memory available (words)	6.5K	22.5K	30.8K
Ladder memory (words)			
built-in memory	3.5K EEPROM	None, requires MC	7.5K flash
with memory cartridge	N/A	up to 15.5K	up to 15.5K
V-memory (words)	3.0K	7.0K	15.3K
Battery backup	Yes	Yes	Yes
Total CPU memory I/O pts. available (<i>actual I/O points depend on I/O configuration selected</i>)	1664 (X+Y+CR+GX)	2688 (X+Y+CR+GX)	8192 (X+Y+GX+GY)
I/O module point density	2/4/8/16/32/64	2/4/8/16/32/64	2/4/8/16/32/64
I/O module slots per base	4/6/8	4/6/8	4/6/8
Local/local expansion			
Serial remote I/O (including local & exp. I/O)	320 in/320 out	320 in/320 out	1024 in/1024 out
Remote I/O Channels	1664 max.	1664 max.	4224 max.
I/O pts. per remote module channel	2	2	3
Ethernet Remote I/O (including local/exp. I/O) discrete I/O pts.	512	512	512; 2048 (port 3)
Yes	Yes	Yes	Yes
1664 max. (Including local and exp.I/O)	2688 max. (Including local and exp.I/O)	8192 max. (Including local and exp.I/O)	
Analog I/O channels	map into V-memory	map into V-memory	map into V-memory
Remote I/O channels	Limited by power budget	Limited by power budget	Limited by power budget
I/O per remote channel	16,384 (limited to 1664)	16,384 (limited to 2688)	16,384 (16 fully expanded H4-EBC slaves using V-memory and bit-of-word instructions)
Performance			
Contact execution (boolean)	3.0µs	0.33µs	0.96µs
Typical scan (1K boolean)	8-10ms	2-3ms	4-5ms
Programming and Diagnostics			
RLL ladder style	Yes	Yes	Yes
RLL PLUS/flowchart style (Stages)	Yes/384	Yes/1024	Yes/1024
Run time editing	No	Yes	Yes
Supports Overrides	No	No	Yes
Variable/fixed scan	Variabile	Variabile	Fixed or variable
Instructions	113	170	210
Control relays	480	1024	2048
Timers	128	256	256
Counters	128	128	256
Immediate I/O	Yes	Yes	Yes
Subroutines	No	Yes	Yes
For/next loops	No	Yes	Yes
Timed interrupt	No	Yes	Yes
Integer math	Yes	Yes	Yes
Floating-point math	No	No	Yes
Trigonometric functions	No	No	Yes
Table instructions	No	Yes	Yes
PID	No	No	Yes
Drum sequencers	No	No	Yes
Bit of word	No	No	Yes
Real-time clock/calendar	No	Yes	Yes
Internal diagnostics	Yes	Yes	Yes
Password security	No	Yes	Multi-level
System and User error log	No	Yes	Yes
IBox instructions	No	No	Yes
CPU Ports Communications			
Built-in ports	2 ports	2 ports	4 ports
K-sequence (proprietary protocol)	Yes	Yes	Yes
DirectNET	Yes	Yes	Yes
Modbus master/slave	No	No	Yes
ASCII out (Print)	No	No	Yes
Maximum baud rate	19.2K	19.2K	38.4K

D4-440/430 Key Features


DL440 CPU

- D4-440 <--->
- D4-440DC-1 <--->
- D4-440DC-2 <--->



DL430 CPU

- D4-430 <--->

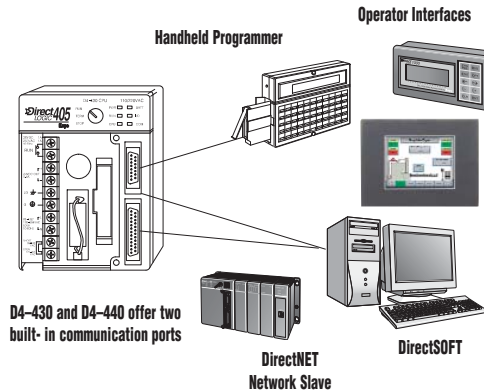

D4-430 CPU

The D4-430 is the most economical CPU in the DL405 product family. If you are primarily looking at the DL405 because of I/O form factor or reasons that don't require tons of CPU horsepower, try the D4-430.

Two built-in communication ports

The D4-430 also offers two communication ports. The top port can be used for a direct connection to a personal computer for programming, to our handheld programmer, to the DV-1000, or to operator interfaces and touch panels. The bottom port is a slave-only port and supports *DirectNET* protocol at speeds up to 19.2K.

Built-in EEPROM memory

One advantage of the D4-430 is 3.5K of built-in EEPROM program memory. A memory cartridge is not required.

D4-440 CPU

The D4-440 provides a subset of the D4-450's capabilities. If you need fast boolean execution, good communications, and complex math or PID isn't required, this is the CPU for you.

Instruction set

The D4-440 instruction set includes most of the capabilities of the D4-450. The D4-440 does not support some of the more advanced instructions such as PID, floating point math, drum sequencers, trig. functions, IBoxes, etc.

Two built-in communication ports

D4-440 offers two communication ports. The top port can be used for a direct connection to a personal computer for programming, to our handheld programmer, to our DV-1000, or to operator interfaces and touch panels. The bottom port is a slave-only port and supports our *DirectNET* or K-sequence protocol at speeds up to 19.2K baud.

Range of power supplies

- The D4-440 provides a wide range of power supply options:
- 110/220 VAC
 - 24 VDC
 - 125 VDC

Memory cartridges

The table below shows the memory cartridges available for the D4-440 and D4-450. The D4-440 requires a memory cartridge for program storage. The D4-450 has 7.5K of built-in FLASH program memory. However, you can use a memory cartridge instead of the built-in memory if you need more program space. (The D4-430 has built-in program memory and cannot use a memory cartridge.)


	D4-RAM-1 <--->	D4-RAM-2 <--->	D4-UV-2 <--->	D4-EE-2 <--->
Program Storage Capacity	7.5K	15.5K	15.5K	15.5K
Cartridge Battery Type	Lithium	Lithium	None	None
Writing Cycle Life	N/A	N/A	1,000	>10,000
Write Inhibit	Internal jumper	Internal jumper	N/A	Internal jumper
Memory Clear Method	Electrical	Electrical	Ultraviolet light	Electrical

D4-440/430 Features

The following diagram shows the various hardware features found on the D4-440 CPU. The D4-430 looks the same, except that the memory cartridge slot can not be used.

CPU Keyswitch	
RUN	Forces CPU to RUN mode
TERM	Allows peripherals (HPP, DCM, <i>DirectSOFT</i> , etc.) to select operating and TEST modes.
STOP	Forces CPU to STOP mode

CPU Status Indicators					
PWR	ON OFF	CPU power good CPU power failure	BATT	ON OFF	CPU battery low CPU battery good
RUN	ON OFF	CPU in RUN mode CPU in STOP mode	I/O	ON OFF	I/O diagnostics error I/O diagnostics OK
CPU	ON OFF	CPU diagnostic error CPU diagnostics OK	COM	ON OFF	Communication error Communication OK

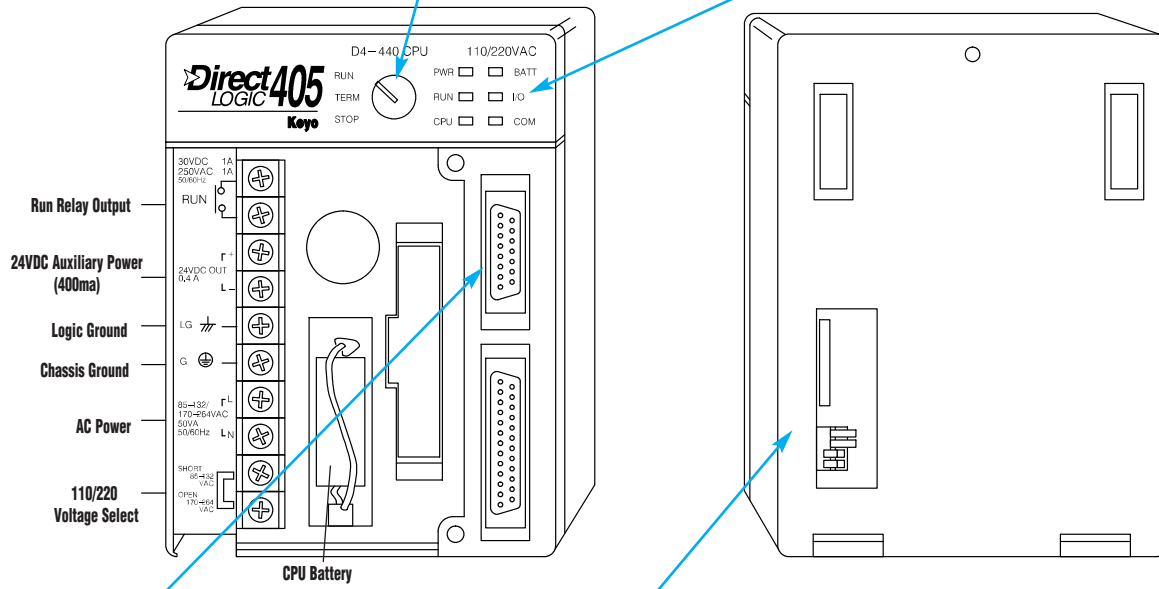


Communication Ports	
15 Pin	Programming port, RS232C, 9600 Baud, K-sequence protocol, connects to HPP, <i>DirectSOFT</i> , DV-1000 and some operator interfaces
25 Pin	Auxiliary port, R232C or RS422, Baud rate selectable via CPU dipswitch, K-sequence protocol, <i>DirectNET</i> protocol (slave only) connects to <i>DirectNET</i> , <i>DirectSOFT</i> , and other operator interfaces

CPU Dipswitch		
SW1	ON	CPU battery disabled
	OFF	CPU battery enabled
SW2	ON	Station address is 1
	OFF	Station address set by HPP

SW3	SW4	Baud
OFF	OFF	300
OFF	ON	1,200
ON	OFF	9,600
ON	ON	19,200

D4-430/D4-440 communications ports pin-outs

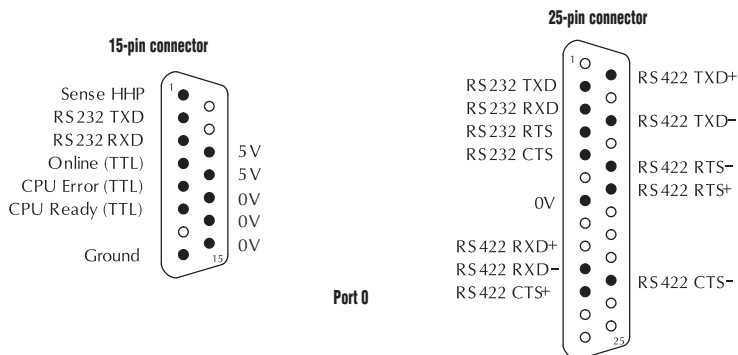

DL405 Programming Tools and Cables


Select a programming device

There are two tools for programming the DL405 CPUs: *DirectSOFT* PC-based programming software and the D4-HPP-1 handheld programmer.

DirectSOFT programming software

Our powerful Windows-based programming packages make it easy for you to program and monitor your DL405 PLC system. The version of the software that supports the DL405 CPUs is described in the table below. See the Software section in the desk reference for detailed information on *DirectSOFT*.

DirectSoft Part Number	Price	Description
PC-DSOFT5	<--->	Programs all PLC families DL05/06/105/205/305/405

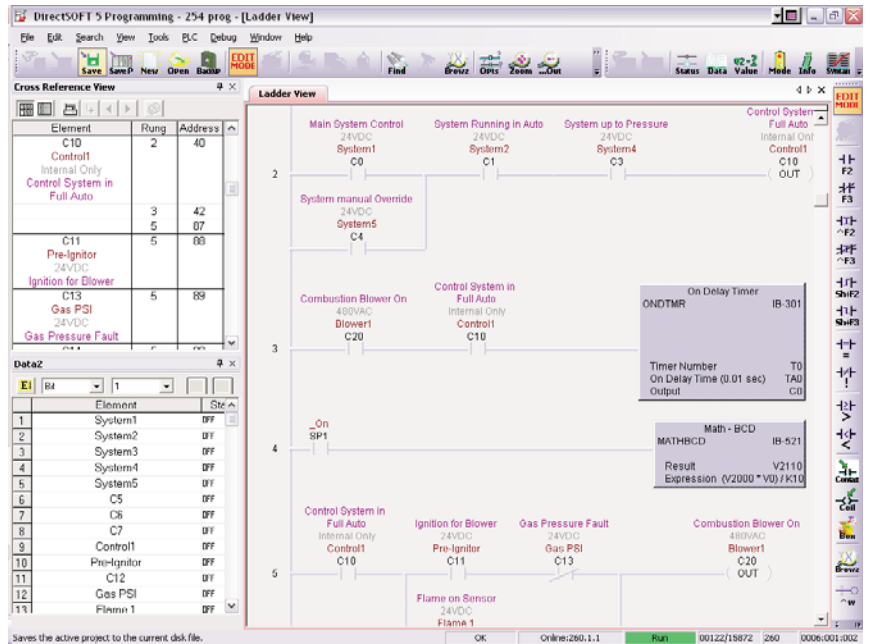


DL405 programming cables

Choose the proper cable to connect the DL405 CPU to your PC running *DirectSOFT*.


CPU	Price	Port	Cable	Price
D4-430/ D4-440	<--->	Top port (15 pin)	D4-DSCBL	<--->
	<--->	Lower port (25 pin)	D3-DSCBL-2	<--->
D4-450	<--->	Top port (15 pin)	D4-DSCBL	<--->
	<--->	Lower port (25pin)	D3-DSCBL-2	<--->
	<--->	Phone jack (RJ12)	D2-DSCBL	<--->

Pin labeling conforms to IBM DTE and DCE standards

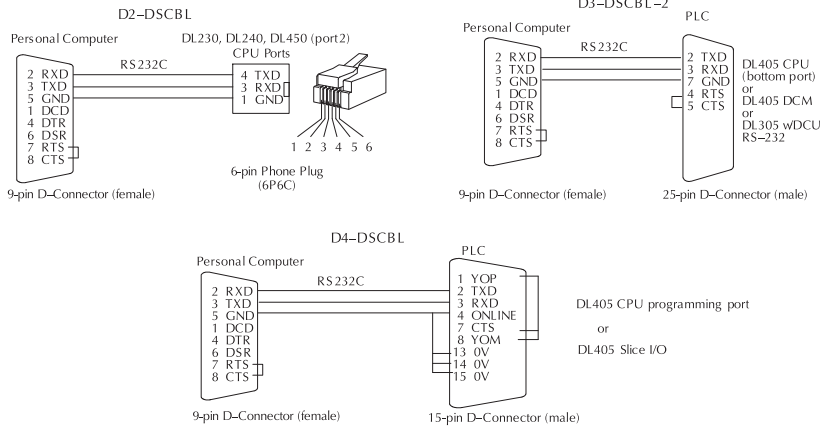

Handheld programmer

The D4-HPP-1 handheld programmer connects to the 15-pin port on any of the DL405 CPUs. A memory cartridge is located on the side of the handheld programmer. This slot allows you to copy memory cartridges (including UV PROMs) and transfer data/programs between the CPU and a memory cartridge.

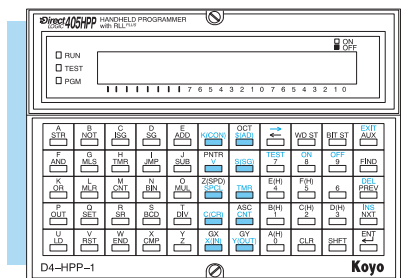

There are three optional connecting cables available for use with the D4-HPP-1 programmer:

- D4-HPCBL-1: 3m cable
- D4-HPCBL-2: 1.5m cable
- D4-CASCBL: cassette cable