




More Precision.


eddyNCDT 3300

Non contact eddy current sensors

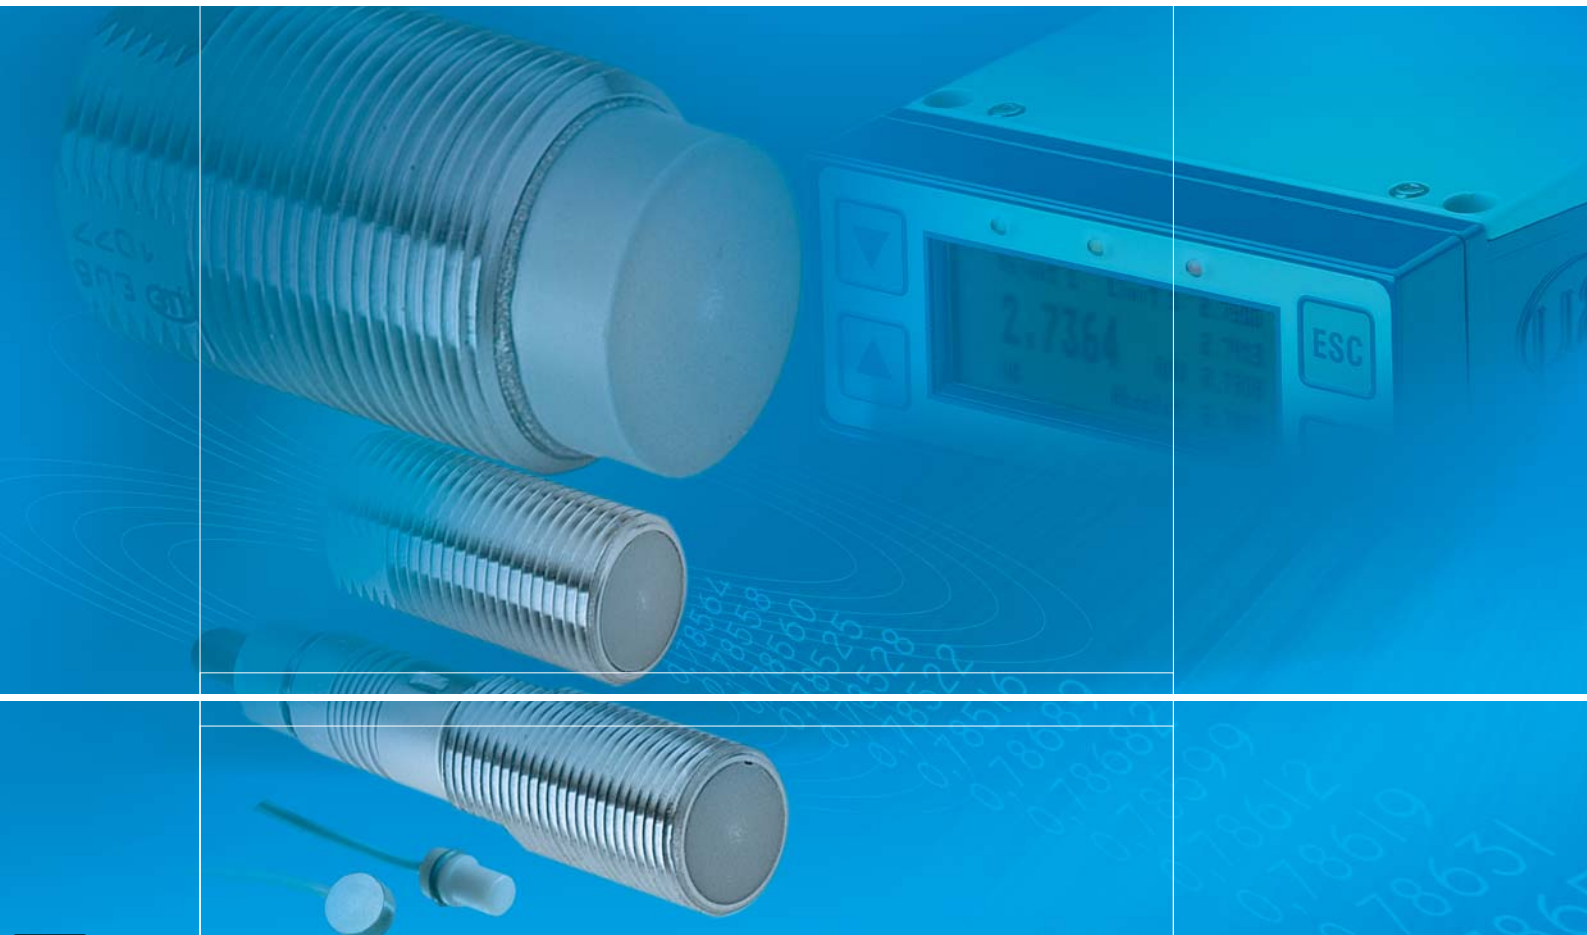

eddyNCDT 3300

High precision eddy current sensors

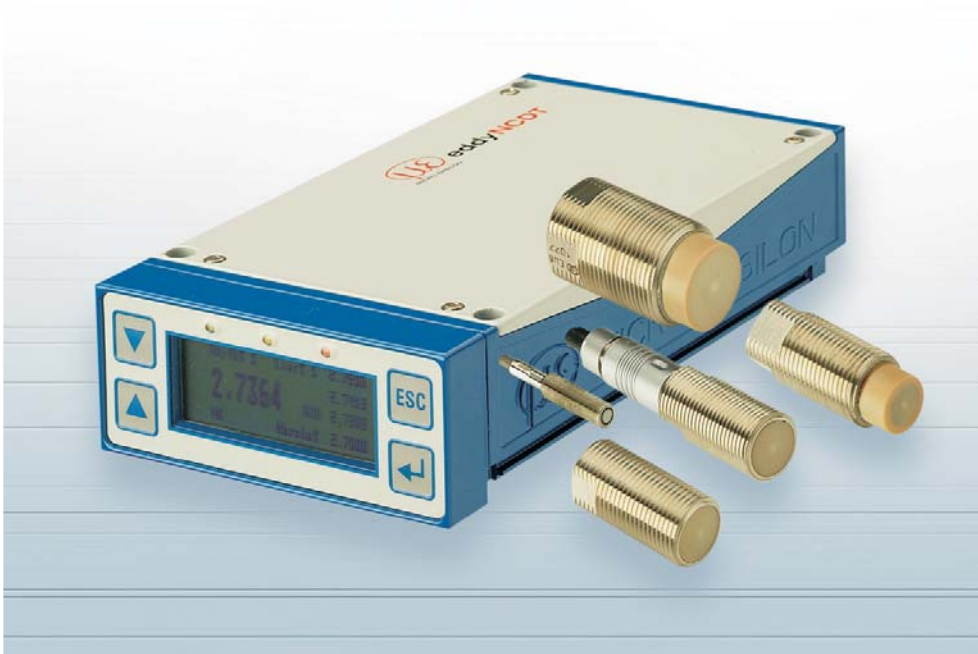


FEATURES

- non-contact and wear-free measurement
- different sensor types
- nanometre resolution
- robust sensor construction for harsh environments
- bandwidth up to 100kHz (-3dB)

For many years, Micro-Epsilon has been a pioneer in displacement measurement using eddy current technology. The eddyNCDT 3300 eddy current measuring system, for example, is considered to be one of the most powerful displacement measurement systems in the world today. Due to a mature technical design, the system offers numerous benefits to customers in multiple application areas.

Measuring principle

The eddy current principle occupies a unique position amongst inductive measuring methods. The measuring principle is based on the extraction of energy from an oscillating circuit. This energy is required for the induction of eddy currents in electrically-conductive materials. Here, a coil is supplied with an alternating current, causing a magnetic field to form around the coil. If an electrically-conducting object is placed in this magnetic field, eddy currents are induced which form a field according to Faraday's induction law. This field acts against the field of the coil, which also causes a change in the impedance of the coil. The impedance can be calculated by the controller by looking at the change in the amplitude and phase position of the sensor coil.

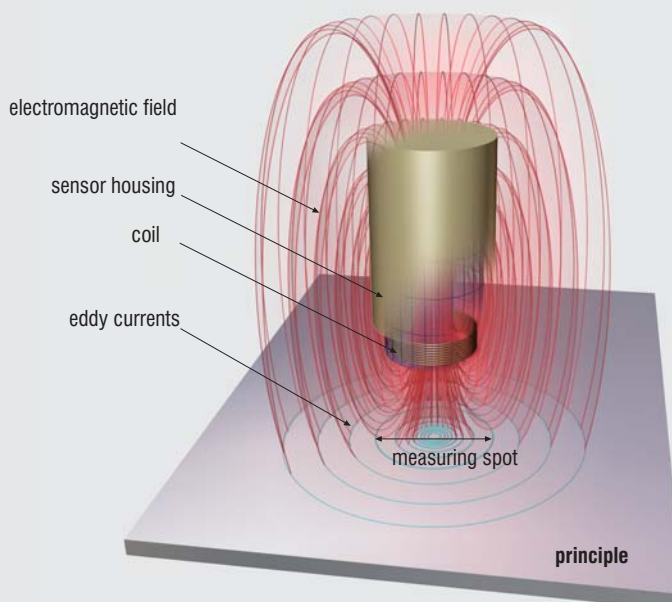

Stability and robustness with maximum precision: eddyNCDT eddy current sensors

Eddy current sensors from Micro-Epsilon are often used in applications where harsh ambient conditions are present and where maximum precision is required. The resistance to high pressure and extreme temperature is also critical. The many designs of eddy current sensor enable engineers to select the optimal sensor for their particular application.

Miniaturised sensors

Because of its variable coil geometry and innovative production technologies, miniature eddyNCDT sensors have housing dimensions of just a few millimetres.


The most important sensor benefits at a glance

- pressure-resistant versions up to 2,000 bar
- temperature resistance from -40 to 200°C (other temperature ranges on request)
- miniature sensors with installation sizes of less than 2mm
- robust and resistant IP67 versions

Ideal for temperature fluctuations

- active sensor, cable and controller temperature compensation
- extreme temperature stability of just 0.015% / °C

Temperature drift by comparison

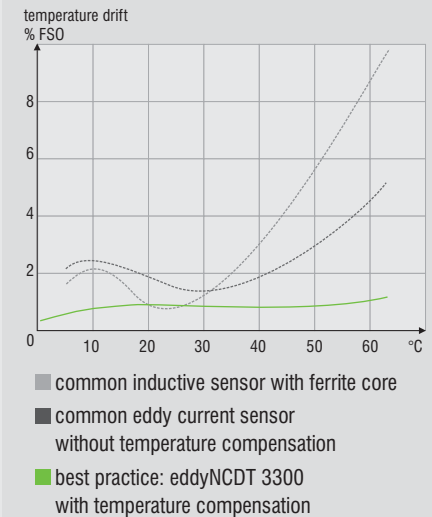

Quadruple limit switch

- two freely definable minimum and maximum limit values
- individual switching threshold
- LED display for upper and lower limit warnings

Automatic calibration


- Three-point linearisation for optimum on-site calibration

Four configurations can be stored

- factory calibration and three individual configurations can be stored
- simple microprocessor-controlled single-cycle calibration

Ideal for fast measurements

- bandwidth 25kHz or 100kHz (-3 dB)

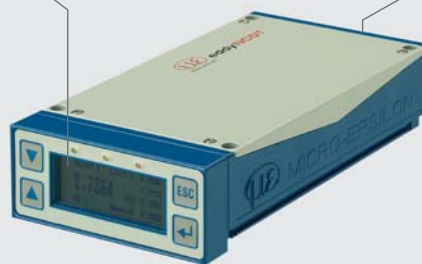

Multifunctional types of output

- voltage / current
- metric / inch and graphical display
- display of auto-zero, peak-to-peak value, minimum, maximum
- scalable display for conversion to indirect measured values

New generation controller

The eddyNCDT 3300 system includes high-performance processors for reliable signal conditioning and further processing. The innovative three-point linearisation technique it uses enables almost completely automatic linearisation which makes possible the optimum accuracies for every metallic measuring object and every installation environment. Operation is supported by an illuminated LC graphical display and on-screen prompts.


eddyNCDT 3300

Controller functions


Functions overview

- microprocessor-supported linearisation
- dialogue-supported fourbutton operation
- numeric / graphical measured value display
- measured value display
- freely configurable limit values
- calibration settings
- basic settings
- system information
- filter options 25Hz, 2.5kHz, 25kHz

Multifunction controller

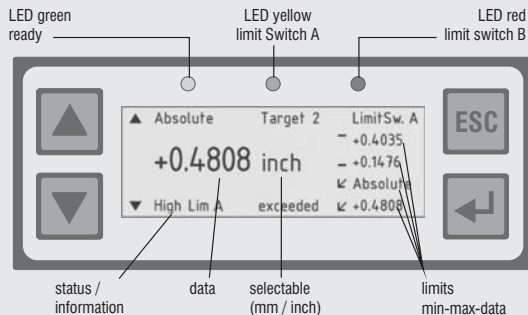


Controller dimensions

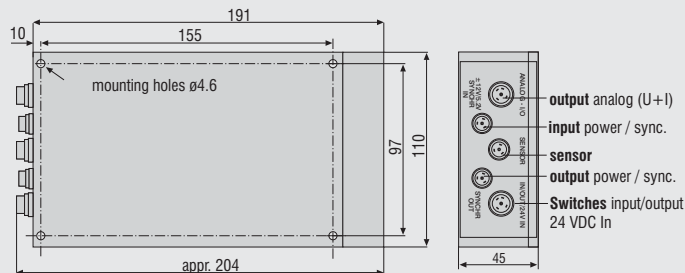

Linearisation and calibration

Systems in the eddyNCDT 3300 series can be individually linearised and calibrated by the user. Therefore, optimum measurement accuracies will always be achieved, even in the case of failed measuring object materials or harsh ambient conditions. The adjustment is made using three distance points (①, ②, ③) which are defined by a reference standard.

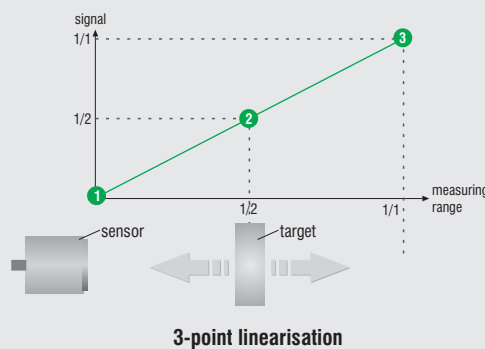


Maximum precision due to field calibration

In order to achieve maximum precision, eddyNCDT 3300 provides the field calibration function for achieving extremely precise measurement results. The following influences are taken into account:

- A: different target materials**
- B: different target sizes (measuring spot)**
- C: target shape**
- D: Side preattenuation**
- E: target tilt angle**

The measuring range can also be extended using the field calibration.

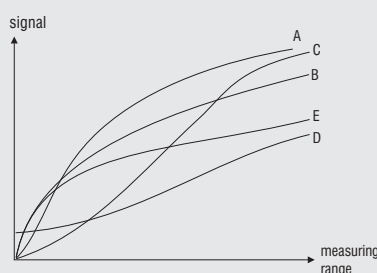

Massive linearity deviation results from the different influences



best practice:
eddyNCDT 3300 with Micro-Epsilon field calibration
High accuracy though compensation of the influences


eddyNCDT 3300 System structure

System design:

A single measurement channel comprising


- one sensor
- the sensor cable
- one adaptation board
- one controller
- the power supply
- and the signal cable

Cables and accessories for signal further processing and synchronisation are available for extended measurement channels (see pages 11 / 16).

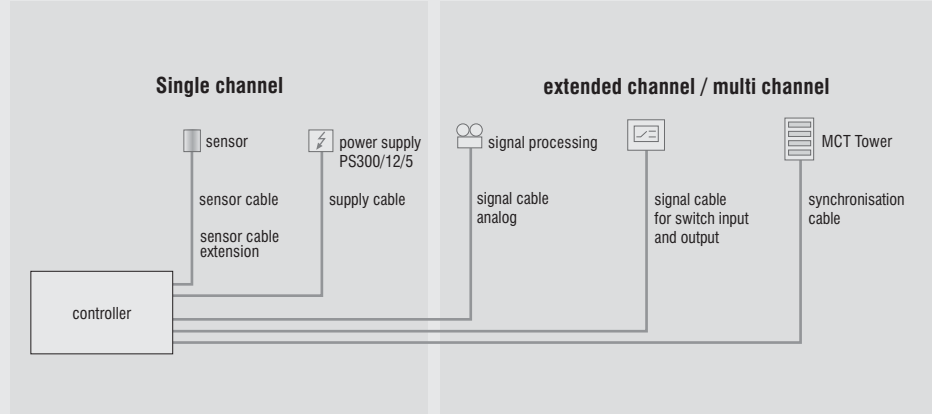

Can be synchronised for multi-channel applications

The MCT304 multi-channel platform is available for thickness and displacement measurements with up to four channels. Up to four controllers can be integrated in a single MCT platform. The platforms can be synchronised with each other, whereby the simultaneous operation of any number of eddyNCDT sensors is possible. In order to compensate for opposing sensor influences, there are synchronisation inputs and outputs.

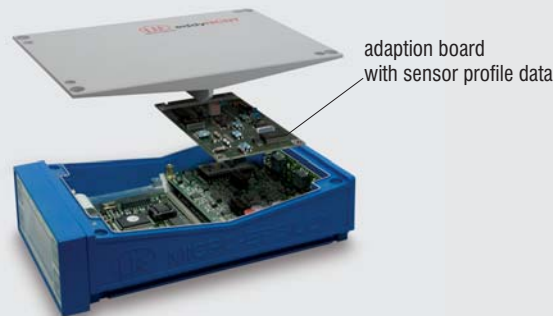

Fast sensor replacement by changing the adaptation board

The eddyNCDT 3300 measurement system consists of a sensor, the sensor cable and the controller with adapter board. This design makes it possible to operate all eddyNCDT sensors with only one controller. The adapter board represents the link between sensor, cable and the electronics. The sensor type used, the cable length and the target material are stored on this board. It adapts the various sensors to the oscillator and demodulator standard circuits and also contains the settings for temperature compensation. When replacing or changing a sensor, only the sensor, sensor cable and adapter board need to be replaced.

eddyNCDT 3300

Technical data

All data refer to eddyNCDT sensors in combination with controller DT330x and relate to the particular sensor measuring range.			
Controller	model	DT3300	DT3301
	power supply	± 12 VDC / 100 mA, 5.2 VDC / 220 mA ¹⁾	11 - 32 VDC / 700 mA
Measuring ranges	mm	0.4 / 0.5 / 0.8 / 1 / 2 / 3 / 4 / 6 / 8 / 15 / 22 / 40 / 80	
Offset		~ 10 % FSO	
Linearity		$\leq \pm 0.2$ % FSO	
Resolution ²⁾	up to 25 Hz	≤ 0.005 % FSO (≤ 0.01 % FSO with measuring ranges 0.4 and 0.5 mm)	
	up to 2.5 kHz	≤ 0.01 % FSO	
	up to 25 / 100 kHz	≤ 0.2 % FSO	
Frequency response		25 kHz / 2.5 kHz / 25 Hz (-3 dB) selectable 100 kHz for measuring ranges ≤ 1 mm	
Temperature compensation range		10 ... 100 °C (option TCS: -40 ... 180 °C) ³⁾	
Temperature range	sensors / cable	-40 ... 200 °C (details see sensor description)	
	controller	5 ... 50 °C	
Temperature stability	sensors	$\leq \pm 0.015$ % FSO/°C / $\leq \pm 0.025$ % FSO/°C (see sensor description)	
Sensor cable length		3 m (± 0.45 m) - optional up to 15 m	
Signal output		selectable 0 ... 5 V; 0 ... 10 V; ± 2.5 V; ± 5 V; ± 10 V (or inverted); 4 ... 20 mA (load 350 ohm)	
Electromagnetic compatibility		acc. to EN 50081-2 / EN 61000-6-2	
Controller functions		limit switches, auto-zero, peak-to-peak, minimum, maximum, average, storage of 3 configurations (calibrations)	

FSO = Full Scale Output

Reference material: Aluminum (non-ferromagnetic) and Mild Steel DIN 1.0037 (ferromagnetic)

Reference temperature for reported data is 20°C (70 °F); Resolution and temperature stability refer to midrange

Data may differ with magnetic inhomogen material.

¹⁾ additional 24 VDC for external reset and limit switch

²⁾ resolution data are based on noise peak-to-peak values

³⁾ temperature stability may differ with option TCS


Tips for selecting the correct sensor

The respective characteristics must be taken into account when selecting the correct sensor from the various models available. The designations and symbols used are explained in the diagram opposite.

■ **Standard sensor:** Models that are characterised by high temperature stability, standard mounting options and proven design.

▲▲▲ **Measurement direction:** The measurement is made in this direction

▲ **Connector side:** with plug-in connection (for sensors with plug connectors)

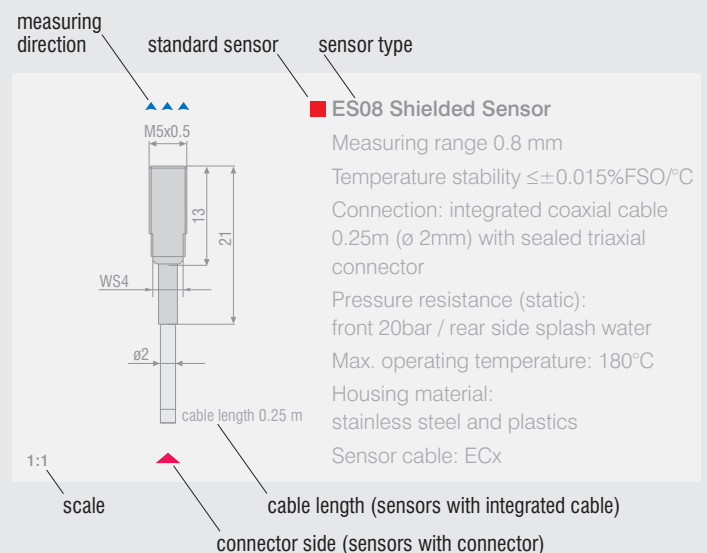









eddyNCDT 3300

Sensor dimensions and specifications

■ standard sensor

▲▲▲ measuring direction

▲ connector side

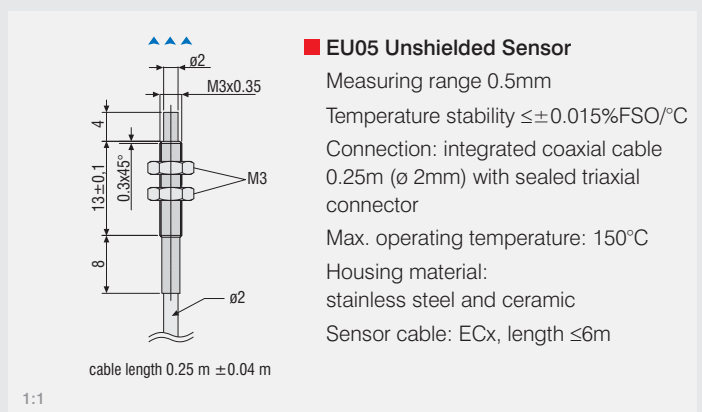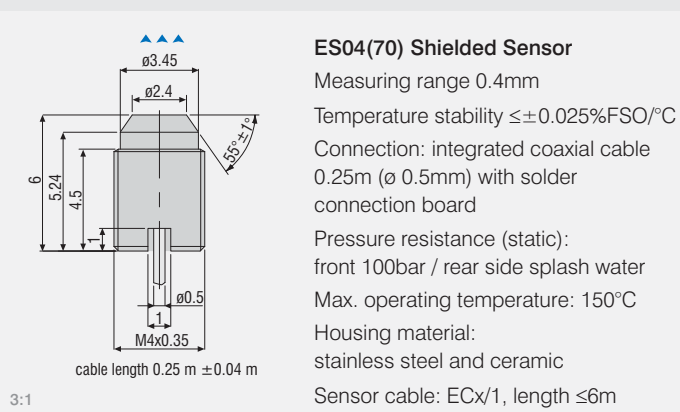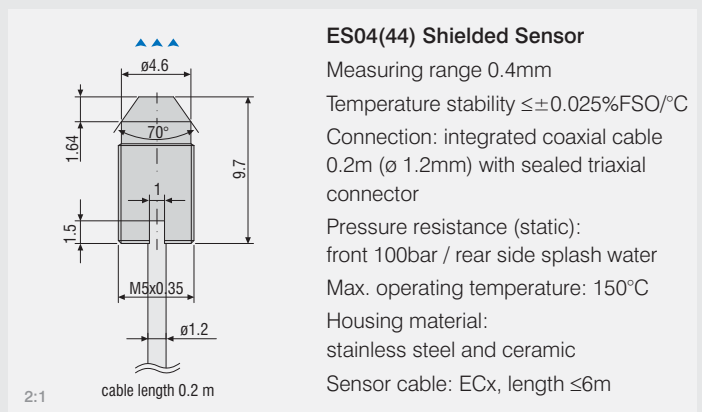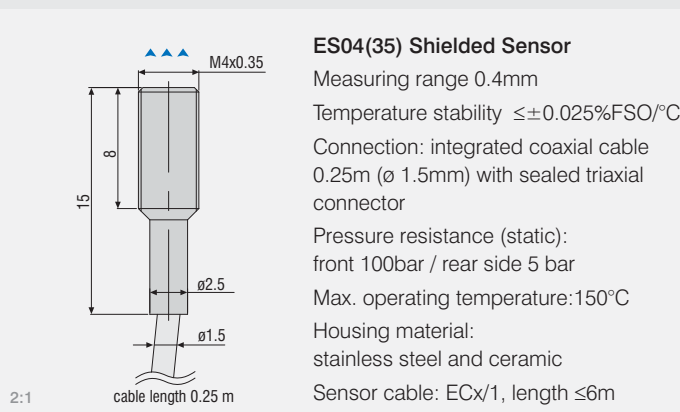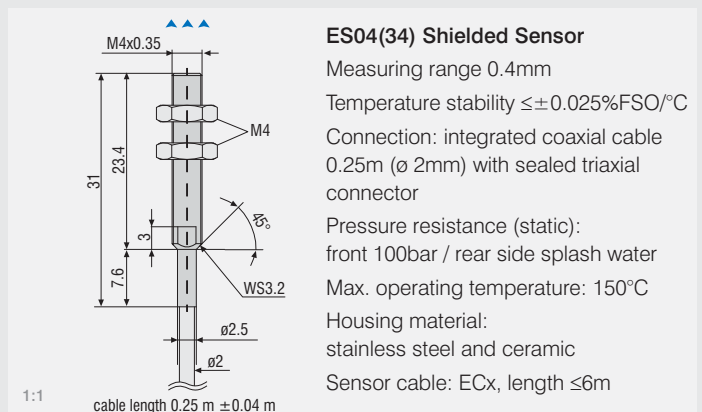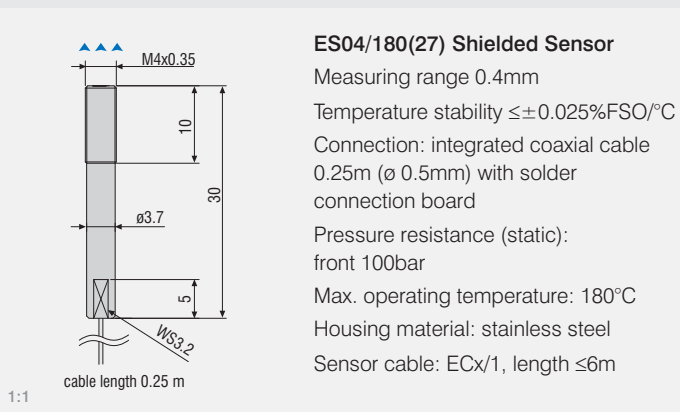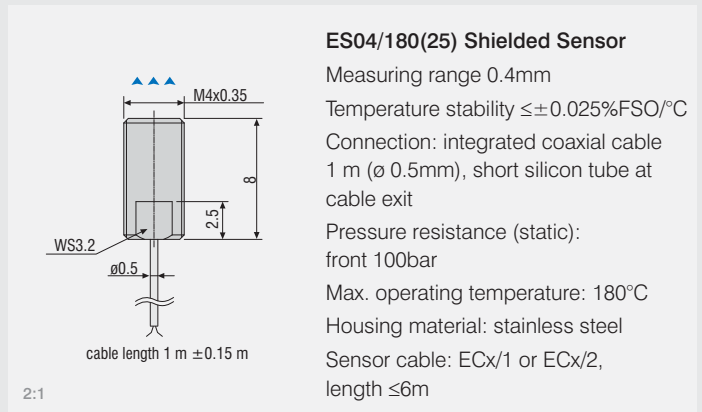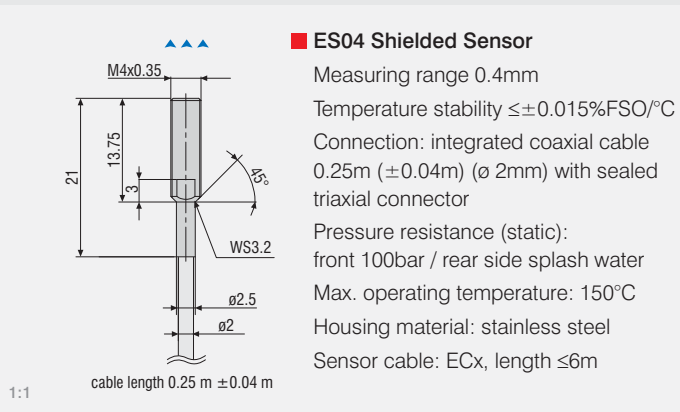


eddyNCDT 3300

Sensor dimensions and specifications

■ standard sensor

▲▲▲ measuring direction


▲ connector side



3:1

EU05(10) Unshielded Sensor


Measuring range 0.5mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Max. operating temperature: 150°C
 Housing material: stainless steel and ceramic
 Sensor cable: ECx/1, length $\leq 6\text{m}$



2:1

ES05/180(16) Shielded Sensor


Measuring range 0.5mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Max. operating temperature: 180°C
 Housing material: stainless steel and epoxy
 Sensor cable: ECx/1, length $\leq 6\text{m}$



3:1

ES05(36) Shielded Sensor


Measuring range 0.5mm
 Connection: integrated coaxial cable 0.5m (\varnothing 0.5mm) with solder connection board
 Max. operating temperature: 150°C
 Housing material: stainless steel and epoxy
 Sensor cable: ECx/1, length $\leq 6\text{m}$

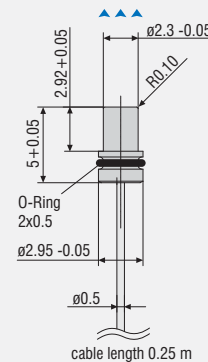

2:1

EU05(65) Unshielded Sensor


Measuring range 0.5mm
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Pressure resistance (static): front 700bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: ceramic
 Sensor cable: ECx/1, length $\leq 6\text{m}$



3:1

EU05(66) Unshielded Sensor


Measuring range 0.5mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Pressure resistance (static): front 400bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: ceramic
 Sensor cable: ECx/1, length $\leq 6\text{m}$



3:1

EU05(72) Unshielded Sensor


Measuring range 0.5mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Pressure resistance (static): front 2000bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: ceramic
 Sensor cable: ECx/1, length $\leq 6\text{m}$



2:1

EU05(93) Unshielded Sensor


Measuring range 0.5mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 0.5mm) with solder connection board
 Pressure resistance (static): front 2000bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: ceramic
 Sensor cable: ECx/1, length $\leq 6\text{m}$

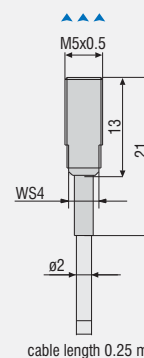

1:1

■ ES08 Shielded Sensor


Measuring range 0.8mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable 0.25m (\varnothing 2mm) with sealed triaxial connector
 Pressure resistance (static): front 20bar / rear side splash water
 Max. operating temperature: 180°C
 Housing material: stainless steel and plastic
 Sensor cable: ECx

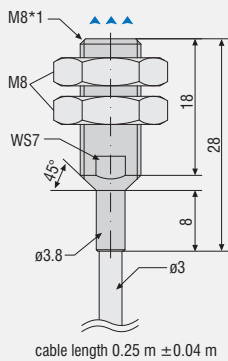

■ ES1 Shielded Sensor

Measuring range 1mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 0.25m ($\varnothing 3\text{mm}$) with sealed triaxial
 connector
 Max. operating temperature: 150°C
 Housing material: stainless steel
 Sensor cable: ECx


1:1

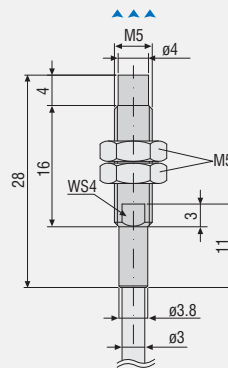

■ EU1 Unshielded Sensor

Measuring range 1mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 0.25m ($\pm 0.04\text{m}$) ($\varnothing 3\text{mm}$) with sealed
 triaxial connector
 Max. operating temperature: 150°C
 Housing material:
 stainless steel and plastic
 Sensor cable: ECx


1:1



■ EU1FL Unshielded flat sensor

Measuring range 1mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 0.25m ($\varnothing 2\text{mm}$) with sealed triaxial
 connector
 Max. operating temperature: 150°C
 Housing material:
 stainless steel and epoxy
 Sensor cable: ECx


1:1



■ EU1/180(103) Unshielded Sensor

Measuring range 1mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 0.25m ($\varnothing 0.5\text{mm}$) with solder
 connection board
 Pressure resistance (static):
 front and rear side 20bar
 Max. operating temperature: 180°C
 Housing material:
 stainless steel and plastic
 Sensor cable: ECx


2:1



■ ES1/200 Shielded Sensor

Measuring range 1mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 0.5m ($\varnothing 0.5\text{mm}$) with solder connection
 board
 Max. operating temperature: 200°C
 Housing material:
 stainless steel and epoxy
 Sensor cable: ECx/2
 Special assembly references - please
 request further drawings


2:1



■ ES2 Shielded Sensor

Measuring range 2mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: sealed triaxial connector
 Pressure resistance (static):
 front 20bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material:
 stainless steel and plastic
 Sensor cable: ECx


1:2

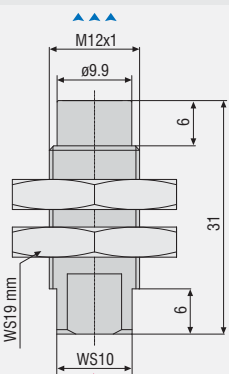

■ EU3 Unshielded Sensor

Measuring range 3mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated coaxial cable
 Pressure resistance (static):
 front 20bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material:
 stainless steel and plastic
 Sensor cable: ECx

1:1



■ ES4 Shielded Sensor

Measuring range 4mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: sealed triaxial connector
 Pressure resistance (static):
 front 20bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material:
 stainless steel and plastic
 Sensor cable: ECx

1:1

eddyNCDT 3300

Sensor dimensions and specifications


■ standard sensor

▲▲▲ measuring direction

▲ connector side

■ EU6 Unshielded Sensor


Measuring range 6mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: sealed triaxial connector
 Pressure resistance (static): front 20bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: stainless steel and plastic
 Sensor cable: ECx



1:2

■ EU8 Unshielded Sensor


Measuring range 8mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: sealed triaxial connector
 Pressure resistance (static): front 20bar / rear side splash water
 Max. operating temperature: 150°C
 Housing material: stainless steel and plastic
 Sensor cable: ECx



1:2

■ EU15 Unshielded Sensor


Measuring range 15mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: epoxy
 Sensor cable: ECx



1:3

■ EU15(01) Unshielded Sensor


Measuring range 15mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: plastics
 Sensor cable: ECx



1:2

■ EU15(05) Unshielded Sensor


Measuring range 15mm
 Temperature stability $\leq \pm 0.025\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Sensor with an elliptical hole to measure through laser optically
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: epoxy
 Sensor cable: ECx



1:2

■ EU22 Unshielded Sensor


Measuring range 22mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: epoxy
 Sensor cable: ECx

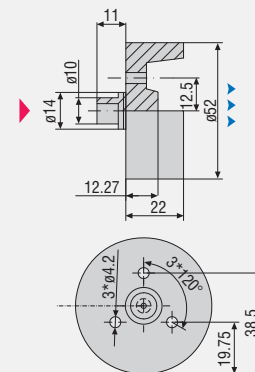

1:3

■ EU40 Unshielded Sensor


Measuring range 40mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: epoxy
 Sensor cable: ECx

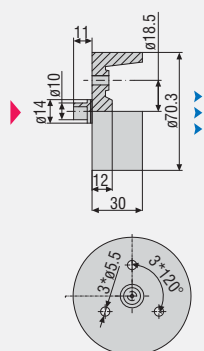

1:3

■ EU80 Unshielded Sensor

Measuring range 80mm
 Temperature stability $\leq \pm 0.015\% \text{FSO}/^\circ\text{C}$
 Connection: integrated sealed triaxial connector ($\varnothing 10\text{mm}$)
 Pressure resistance (static): front and rear side splash water
 Max. operating temperature: 150°C
 Housing material: epoxy
 Sensor cable: ECx

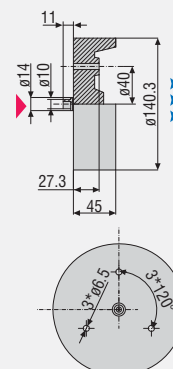


1:8


eddyNCDT 3300

Cable - dimensions and specifications

ECx sensor cable, Length is selectable up to $x \leq 15m$

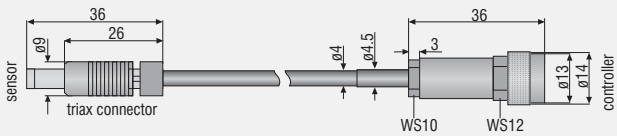


ECx/90 sensor cable with 90° connector (sensor-sided)
Length selectable up to $x \leq 15m$

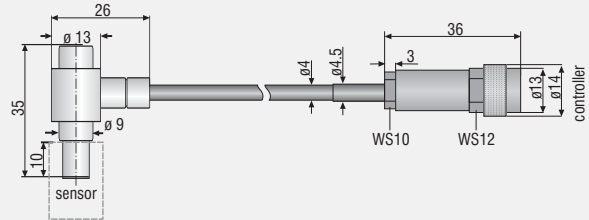


ECx/1 extension cable for solder connection

Sensor connection to transition board, both ends soldered.
Length selectable up to $x \leq 15m$

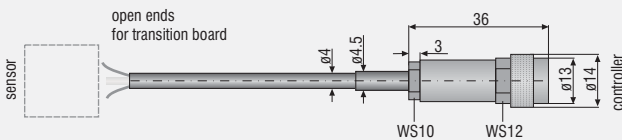


ECx/2 extension cable with miniature triax connector

Solder connection with transition board, sensor cable soldered, extension cable plugged. Length selectable up to $x \leq 15m$

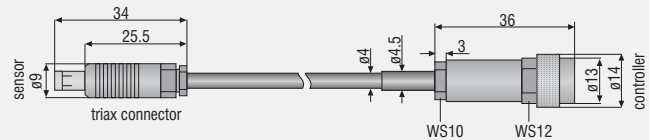


SCA3/5 signal cable

for output signal voltage and current output 4 - 20mA, with open, tinned ends and eight-pole female connector suitable for DT3300 or DT3301 controller; length 3m

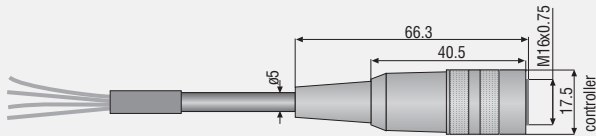


SCA3/5/BNC signal cable

Signal cable analogue with BNC-connector for output voltage and tinned ends wires for current output 4 - 20mA, eight-pole female connector suitable for DT3300 or DT3301 controller; length 3m

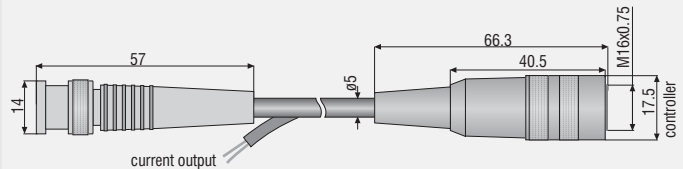


Transition board for ECx/1

both sides for soldering, 16 x 10 x 1.5mm (included in delivery)




Transition board for ECx/2

one side with triax connection socket (included in delivery)




SIC3(07) signal cable for direct operation with oscilloscope

Voltage output signal cable with BNC connector; for DT3300 / DT3301 controller; length 3m

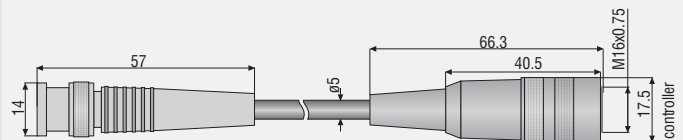


SCD3/8 signal cable, switch-input and -output

with eight-pole male connector, open tinned ends for connecting the reset and / or limit switch output; necessary for 24 VDC supply of DT3301 controller; length 3m

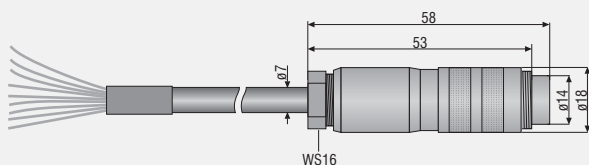

PSC30 supply and synchronisation cable for DT3300, length 0.3m


ESC30 synchronisation cable for DT3301 controller, length 0.3m

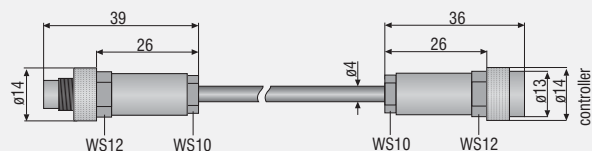


eddyNCDT 3300

How to use

Target size of eddy current sensors



ES (shielded sensor)
Measuring spot = 1.5x sensor diameter



EU (unshielded sensor)
Measuring spot = 3x sensor diameter

The relative size of the measuring object to the sensor affects the linearity deviation for eddy current sensors. Ideally, the measuring object size for shielded sensors should be at least 1.5 times the diameter of the sensor and at least three times the diameter of the sensor for unshielded ones. From this size, almost all lines of magnetic field run from the sensor to the target. Therefore, almost all magnetic field lines penetrate the target via the face and so contribute to eddy current generation, where only a small linearity deviation occurs.

Factory calibration

As standard, the eddy current sensors are tuned to

St37 for ferromagnetic calibration.

Aluminium for non-ferromagnetic calibration


With other materials a factory calibration is recommended.

Assembly references

Eddy current sensors are grouped into shielded (e.g. ES05) and unshielded (e.g. EU05) sensors. With shielded sensors, the field lines run closer together due to a separate casing. These are less sensitive to radial flanking metals. Correct installation is important for signal quality. The following information applies for mounting in ferromagnetic and non-ferromagnetic materials.


Assembly references for shielded sensors (ES) in metal

✓ right




Flush mounting

✓ right



Protruding mounting


✗ false



Surrounding material attenuates the sensor;
Measurement not possible.


Assembly references for unshielded sensors (EU) in metal

✓ right




Sensor must be set up free-standing.
Minimum distance to the sensor: approx. three
times the diameter of the sensor

✓ right



Protruding sensor mounting
(approx. half the sensor's length protruding)

✗ false




Surrounding material attenuates sensor in the
standard version; Measurement not possible.


eddyNCDT 3300

Typical Applications


Eddy current sensors from Micro-Epsilon have many possible areas of application. High measurement accuracy and cut-off frequency with an extremely robust design means the sensors can take measurements that cannot normally be carried out using conventional sensors. The examples show typical applications for eddyNCDT sensors.




Displacement, distance
position, elongation




Vibration, amplitude
clearance, oscillations




Centering, positioning,
tilt, alignment




Thickness of layer, foil,
rubber, insulation




Dimensions, tolerances,
sorting, part recognition




Shaft oscillation, orbit
tracing, shaft displacement




Deflection, deformation,
waviness




Eccentricity, diameter,
concentricity




Bearing oscillations,
lubricating gap, wear




Collector concentricity,
roundness, air gap, pitch




Stroke, deformation, axial
shaft oscillation




Edge control, position, width



Thickness of foil, layer,
profile



Roller gap, roller
deflection, crowning



Compressor/turbine gap,
revolutions

eddyNCDT
Typical applications




Eddy current sensors from Micro-Epsilon represent high-performance measurement, particularly under extreme operating conditions. Environmental influences such as oil, temperature, pressure and moisture are largely compensated for and have a minimal effect on the signal. For this reason, the sensors are ideal in challenging application areas, such as industrial mechanical engineering and automotive inspection systems.


Picture on the left:
Tensile strength testing in steel works

Bottom pictures:
Different industrial applications


Pictures on the right:
Typical engine measurements

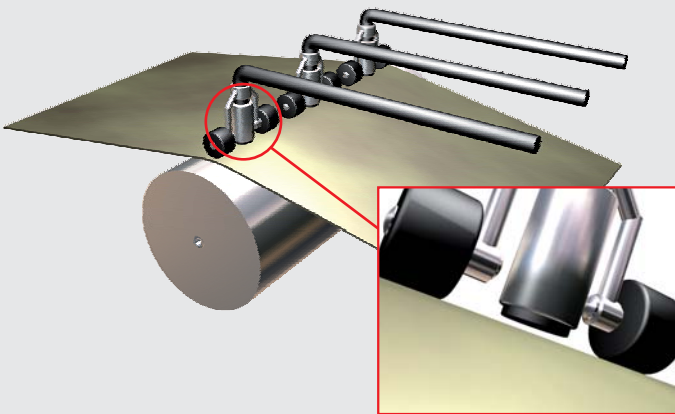


Thickness measurement of rubber.

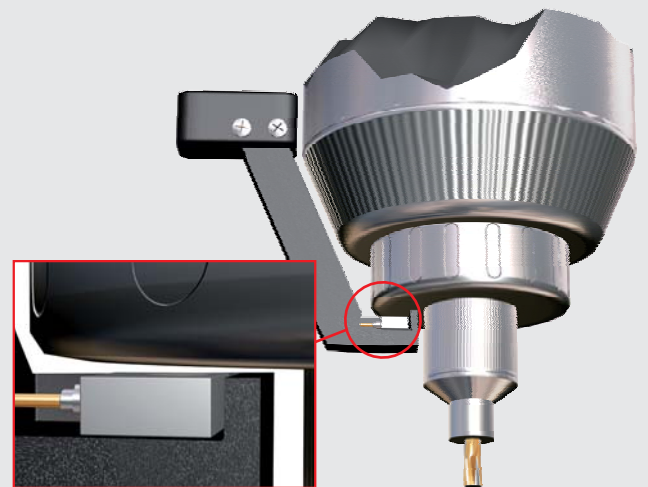

Spindle growth measurement.

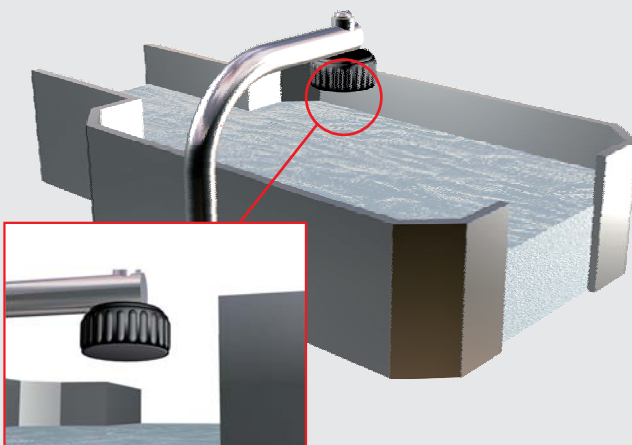


Level of liquid aluminum.

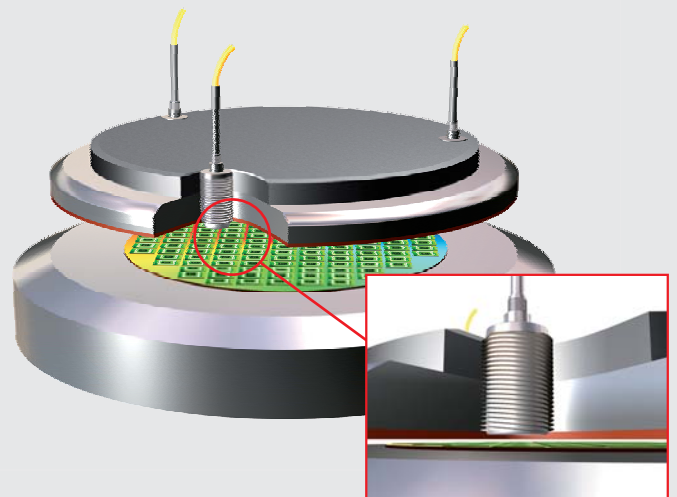

Position of the wafer polishing disk.

Application examples for engine optimisation on the tester

Eddy current sensors from Micro-Epsilon are being used to test internal combustion engines. In towing and firing mode operations, the sensors record different measured values, which can contribute to the improvement of engine characteristics. The high measurement accuracies under extreme engine operating conditions distinguish the eddyNCDT eddy current sensors from competing sensors.

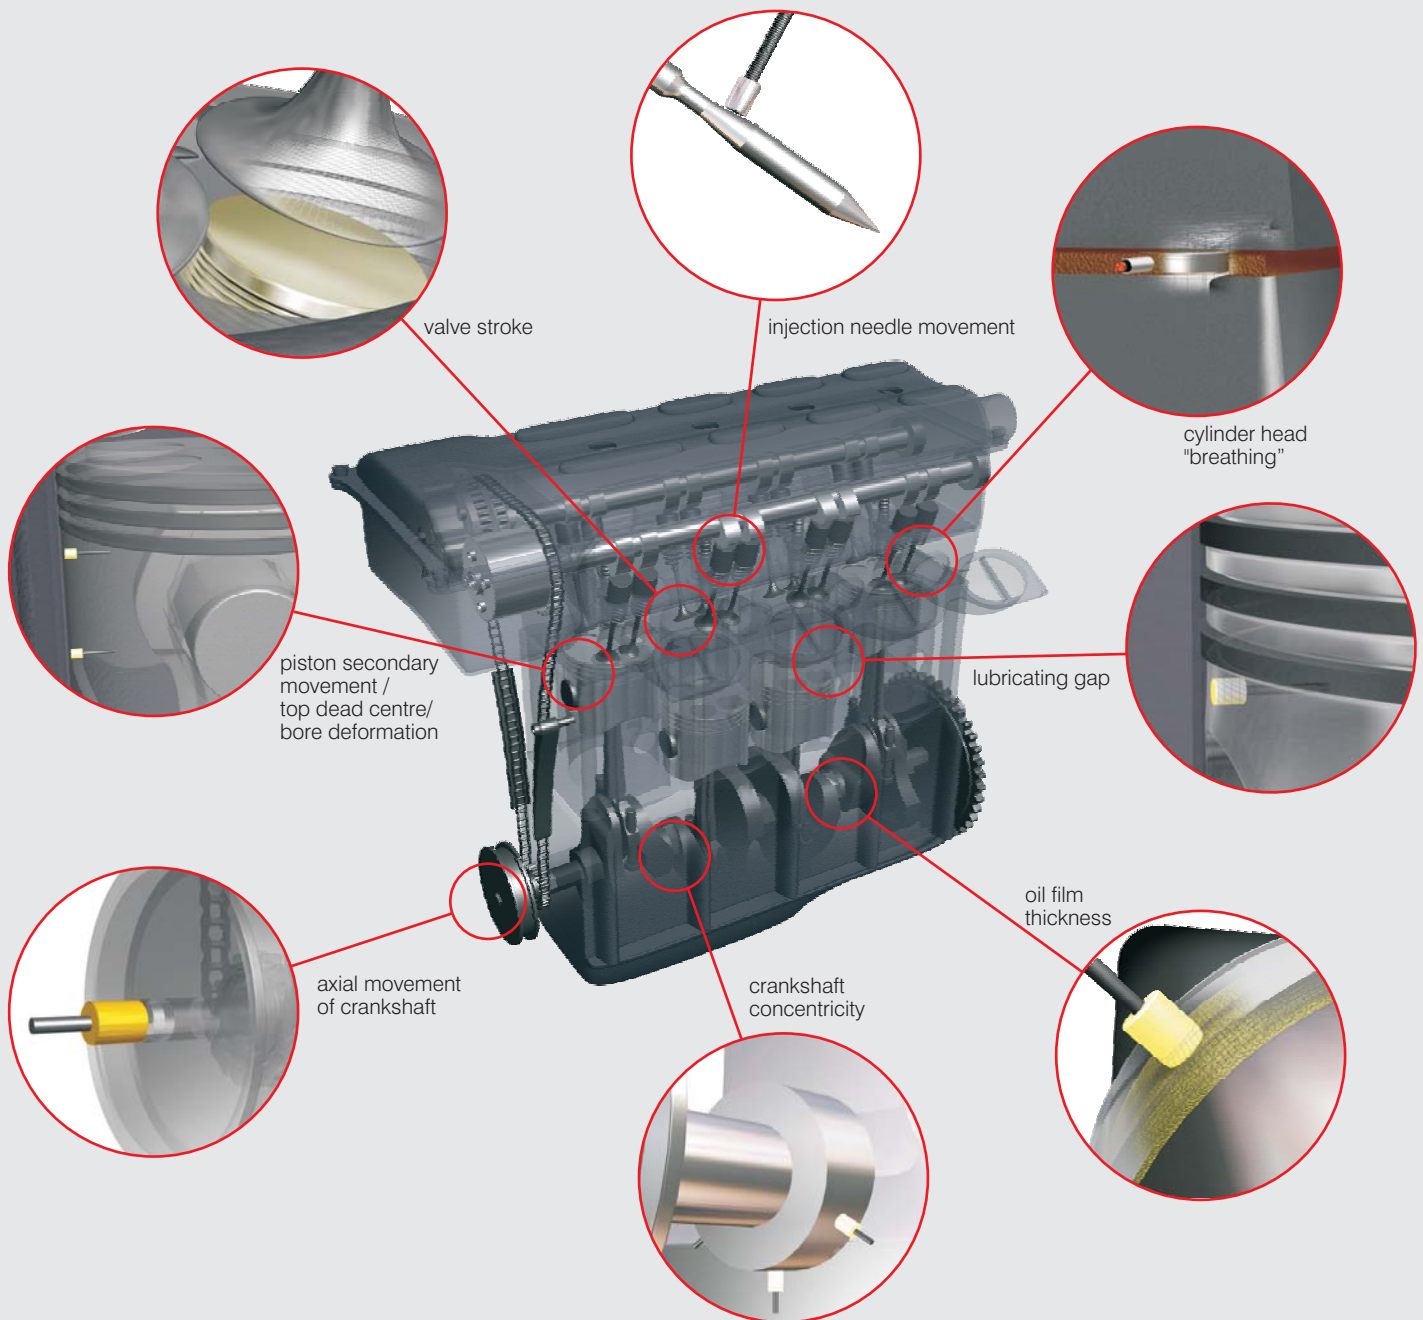

eddyNCDT 3300 Accessories

ECx	Sensor cable , length selectable up to $x \leq 15\text{m}$	PS300/12/5	Power supply input 100 - 240VAC, output $\pm 12\text{VDC} / 5.2\text{VDC}$; integrated cable 1.5m; for max 4x DT3300
ECx/90	Sensor cable with 90° connector (sensor-sided) length selectable up to $x \leq 15\text{m}$	PS2010	Power supply for top-hat rail mounting; for max 4x DT3301; input 115 / 230VAC selectable; output 24VDC / 2.5A
ECx/1	Extension cable for solder connection	MC25	Micrometer calibration fixture range 0 - 25mm; division $2\mu\text{m}$, adjustable offset (zero); for sensors with measuring range $< 22\text{mm}$
ECx/2	Extension cable with miniature triax connector	MC2.5	Micrometer calibration fixture range 0 - 2.5mm, division $1\mu\text{m}$
SCA3/5	Signal cable analogue, 3m	MBC300	Mounting base for controller DT330x; fixing through M4 threaded holes 166x108x60mm
SCA3/5/BNC	Signal cable analogue with BNC connector, 3m	MCT304-SM	Tower for max 4 controller DT3300; supply 100 - 240 VAC
SCD3/8	Signal cable digital (switch input/output), 3m (also for supply 11 - 32VDC); for DT3301	MCT304(01)	Tower for max 4 controller DT3301; supply 11 - 32 VDC
SIC3(07)	Signal cable with BNC-Connector for direct operation with oscilloscope		
PSC30	Power / Synchronisation cable 0.3m, for DT3300		
ESC30	Synchronisation cable 0.3m, for DT3301		

eddyNCDT Product range eddy current sensors

eddyNCDT 3010	Low-Cost single channel system for industrial applications
eddyNCDT 3300	Intelligent eddy current system for very precise measurements
eddyNCDT 3700	Compact eddy current OEM system for differential measurements

MICRO-EPSILON Headquarters

Koenigbacher Str. 15 · 94496 Ortenburg / Germany
Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90
info@micro-epsilon.com

MICRO-EPSILON UK Ltd.

Unit 1 Pioneer Business Park · Ellesmere Port · CH65 1AD
Phone +44 (0) 151 355 6070
info@micro-epsilon.co.uk

MICRO-EPSILON USA

8120 Brownleigh Dr. · Raleigh, NC 27617 / USA
Phone +1/919/787-9707 · Fax +1/919/787-9706
info@micro-epsilon.us



MICRO-EPSILON