


AC-Powered Relay Modules

Our AC-powered relay modules provide isolation, switch high current (10A) loads, are offered in 8 or 16 points.

Modules mount on 35 mm DIN rail part #DN-R35S1 (see Accessories below).

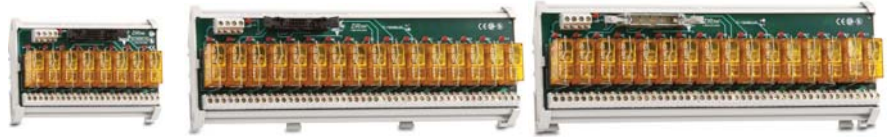

ZL-CM08RL120

ZL-CM16RL120A


ZL-CM16RL120B

Note: Relays included.


Note: Not compatible with DL05 and DL06 PLCs with Relay outputs.

Specifications									
AC Powered Relay Modules	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg
	ZL-CM08RL120	1	<--->	ZL-CM16RL120A	1	<--->	ZL-CM16RL120B	1	<--->
Description	8-channel relay module w/LEDs, 120VAC, 20-pin IDC								
Approvals	UL,CUL,CE								
Contact Type	1 Form C (SPDT)								
Contact Rated Current	10A								
Terminal Block Contacts	Copper alloy, tin-lead plating								
Maximum Switching Voltage	400VAC								
Material Contact	Ag/Ni								
Contact Voltage (per point)	250VAC/30VDC								
Max Power, Inductive	AC 1500VA, DC 150W								
Max Power, Resistive	AC 2500VA, DC 300W								
Minimum Load	100mA 5VDC								
Mechanical Life	2X10 ⁶ cycles								
Coil/Contact Isolation	2000Vrms (up to 1min)								
Input Voltage	88-130VAC 50-60Hz								
Total Input Current	60mA								
Coil Supply Voltage	120VAC -20%/+10%, 50-60hz								
Operate/Release Time	15ms/10ms								
LED Indicator Current	2mA								
Operating Temperature	-10°C to +45°C								
Dimensions (L x W x H)	5.78"x2.30"x2.87" (With Relay)			11.57"x2.30"x2.87" (With Relay)			11.57"x2.30"x2.87" (With Relay)		
Accessories									
	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg
DIN Rail	DN-R35S1	10	<--->	DN-R35S1	10	<--->	DN-R35S1	10	<--->
Angled Support Bracket	DN-ASB1	50	<--->	DN-ASB1	50	<--->	DN-ASB1	50	<--->
End Bracket	DN-EB35	50	<--->	DN-EB35	50	<--->	DN-EB35	50	<--->
Slotted Screwdriver	DN-SS1	1	<--->	DN-SS1	1	<--->	DN-SS1	1	<--->
AC Relays (120VAC)	ZL-RELAY-120	10	<--->	ZL-RELAY-120	10	<--->	ZL-RELAY-120	10	<--->

Dimensions



ZL-CM16RL120A
ZL-CM16RL120B
ZL-CM08RL120

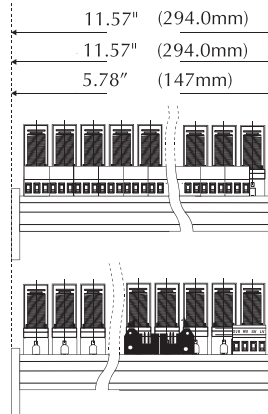

Note: See wiring details on our Web site at:
<http://www.automationdirect.com/static/manuals/ziplinks/ziplinks.html>

Connection Cables

ZIPLink Connection Cables				
Part Number	Description	Insulation Rating	Conductor Size	Price
Standard DL205 8 Channel				
ZL-2CBL1	DL205-8 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-2CBL1-1	DL205-8 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-2CBL1-2	DL205-8 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Standard DL205 16 Channel				
ZL-2CBL2	DL205-16 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-2CBL2-1	DL205-16 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-2CBL2-2	DL205-16 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
LED/Sensor DL205 16 Channel				
ZL-2CBL2L	DL205-16, ZIPLink LED/sensor module cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-2CBL2L-1	DL205-16, ZIPLink LED/sensor module cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-2CBL2L-2	DL205-16, ZIPLink LED/sensor module cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Standard DL305 16 Channel				
ZL-3CBL2	DL305-16 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2-1	DL305-16 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2-2	DL305-16 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
LED/Sensor DL305 16 Channel				
ZL-3CBL2L	DL305-16, ZIPLink LED/sensor module cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2L-1	DL305-16, ZIPLink LED/sensor module cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2L-2	DL305-16, ZIPLink LED/sensor module cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Fuse/Relay DL305 8 Channel				
ZL-3CBL1FR8	DL305-8, ZIPLink fuse/relay module cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL1FR8-1	DL305-8, ZIPLink fuse/relay module cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL1FR8-2	DL305-8, ZIPLink fuse/relay module cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Fuse/Relay DL305 16 Channel				
ZL-3CBL2FR16	DL305-16, ZIPLink fuse/relay module cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2FR16-1	DL305-16, ZIPLink fuse/relay module cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL2FR16-2	DL305-16, ZIPLink fuse/relay module cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Standard DL305 16 Channel				
ZL-3CBL3	DL305-16 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL3-1	DL305-16 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL3-2	DL305-16 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Fuse/Relay DL305 16 Channel				
ZL-3CBL3FRD16	DL305-16, ZIPLink fuse/relay module cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-3CBL3FRD16-1	DL305-16, ZIPLink fuse/relay module cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-3CBL3FRD16-2	DL305-16, ZIPLink fuse/relay module cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Standard DL405 16 Channel				
ZL-4CBL2	DL405-16 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-4CBL2-1	DL405-16 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-4CBL2-2	DL405-16 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->
Standard DL205 or DL405 32 Channel				
ZL-4CBL4	DL205 or DL405-32 ZIPLink cable, 1.6 ft. (0.5M)	300V 80°C	#24 AWG	<--->
ZL-4CBL4-1	DL205 or DL405-32 ZIPLink cable, 3.3 ft. (1.0M)	300V 80°C	#24 AWG	<--->
ZL-4CBL4-2	DL205 or DL405-32 ZIPLink cable, 6.5 ft. (2.0M)	300V 80°C	#24 AWG	<--->

ZL-2CBL1xx



ZL-2CBL2xx



ZL-3CBL2xx



ZL-3CBL3xx



ZL-4CBL2xx



ZL-4CBL4xx



PLC Overview

DL05/06 PLC

DL105 PLC

DL205 PLC

DL305 PLC

DL405 PLC

Field I/O

Software

C-more HMIs

Other HMI

AC Drives

Motors

Steppers/Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pushbuttons/Lights

Process

Relays/Timers

Comm.

TB's & Wiring

Power

Circuit Protection

Enclosures

Appendix

Part Index

Connection Cables (cont.)

ZiLink Connection Cables				
Part Number	Description	Insulation Rating	Conductor Size	Price
Communication Adapter				
ZL-DN15TB-CBL	15 pin shielded cable for DN-15TB module 6.5 ft (2M)	300V 80°C	#28 AWG	<--->
ZL-DN25TB-CBL	25 pin shielded cable for DN-25TB module 6.5 ft (2M)	300V 80°C	#28 AWG	<--->
Ready to Wire w/Pigtail End				
ZL-2CBL2-2P	DL-205-16 Ready-to-wire 20 conductor cable, 2A max/conductor 6.5 ft (2M)	300V 80°C	#24 AWG	<--->
ZL-3CBL3-2P	DL-305-16 Ready-to-wire 24 conductor cable, 2A max/conductor 6.5 ft (2M)	300V 80°C	#24 AWG	<--->
Standard DL05/06				
ZL-CBL056	Ziplink cable for DL05 and 06 16 point I/O modules to Ziplink feedthrough modules (0.5M)	300V 80°C	#24 AWG	<--->
ZL-CBL056L	Ziplink cable for DL05 and 06 16 point I/O LED modules (0.5M)	300V 80°C	#24 AWG	<--->
ZL-CBL056FR	Ziplink cable for DL05 and 06 16 point I/O fuse/relay modules (0.5M)	300V 80°C	#24 AWG	<--->
Standard				
ZL-DB9-CBL	Cable with 9-pin Dsub connectors on both ends, black. male/female, (2M)	300V 80°C	#28 AWG	<--->
ZL-DB15-CBL	Cable with 15-pin Dsub connectors on both ends, black. male/female, (2M)	300V 80°C	#28 AWG	<--->
ZL-DB25-CBL	Cable with 25-pin Dsub connectors on both ends, black. male/female, (2M)	300V 80°C	#28AWG	<--->
ZL-RJ12-CBL	Reverse-wired cable with two RJ12 connectors, black. (2M)	300V 80°C	#28 AWG	<--->

Note: Use ZL-DN15TB-CBL cable only for Communication Module DN-15TB; Super VGA cables will not function correctly.

ZL-2CBL2-2P*



* Can be used with any brand PLC.

ZL-CBL056L



ZL-DN15TB-CBL



ZL-DN25TB-CBL

